
VOLTAGE & PHASE	208V-3P			208V-1P
RATED WATTS	17000W			17000W
NOMINAL AMPS PER LINE	X1/X2	Y1/Y2	Z1/Z2	X1/X2 Z1/Z2
	25	25	25	44
SUPPLY WIRE USE GA, SHAWN (OR LARGER)	AWG #10	AWG #10	AWG #10	AWG #6

Note:
1. USE COPPER WIRE ONLY FOR ELECTRICAL SUPPLY CONNECTIONS.
2. ALL ELECTRICAL INSTALLATION AND SERVICING MUST BE PERFORMED BY A LICENSED ELECTRICIAN.
3. USE WIRE RATED FOR A MINIMUM TEMPERATURE OF 105°C (221°F).
4. USE THE WIRE GAUGE SHOWN OR LARGER.

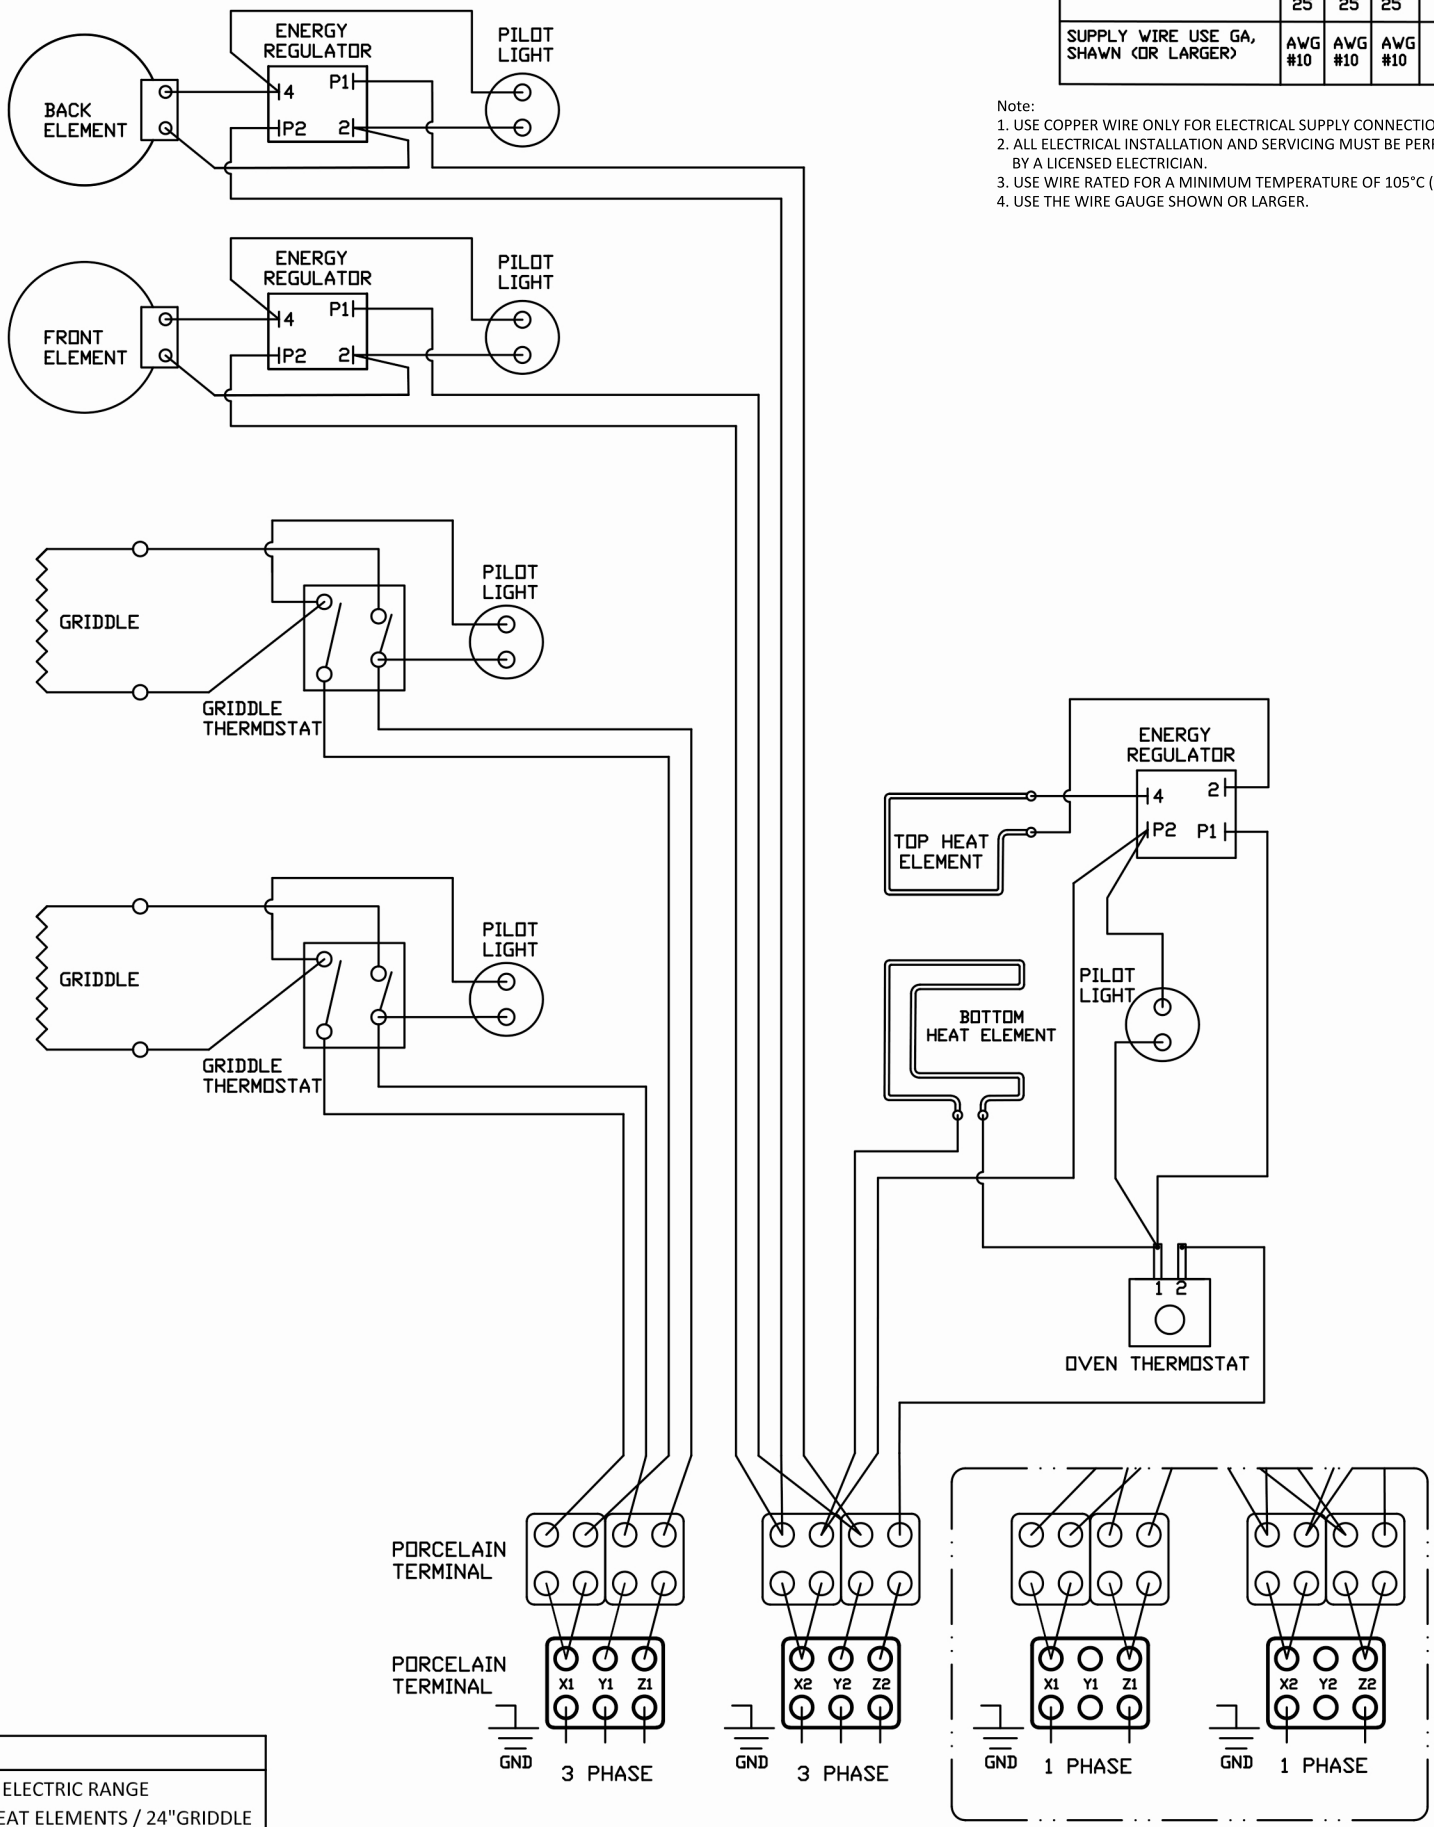

36" ELECTRIC RANGE
2 HEAT ELEMENTS / 24"GRIDDLE AND OVEN