

| Project: | AIA# |
|-----------|------|
| Item: | |
| Location: | SIS# |
| Approved: | |

SIDE MOUNT UNDERCOUNTER REFRIGERATOR

MODEL: UCR67AHC

UCR67AHC Solid Door Refrigerator Hydrocarbon Series



3 Year Parts/Labor Warranty Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, top, door and grille (galvanized steel back &
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Undercounter feature a 1/2" thick sub-top
- Interior thermometer is standard
- Self-closing doors with 120° stay-open feature
- · Magnetic gasket attached to each door for positive seal
- 6" Casters, two (2) with brakes standard
- Two epoxy-coated steel wire shelves per door section
- Field-reversible door

OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- Additional shelves
- Shelf clips
- Right or left hinged door
- Door locks
- Wire shelf divider
- 3" Casters
- 6" legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- · Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F




















| MODEL | UCR67AHC | |
|------------------------------------|---------------|--|
| EXTERNAL DIMENSIONAL DATA | | |
| Width Overall | 67" | |
| Depth Overall with Handle & Bumper | 34 3/4" | |
| Height Overall with 6" Casters | 34 ½" | |
| Number of Doors | 2 | |
| Depth with Door Open 90° | 57 ½ " | |
| Door Opening | 21 %" x 23 %" | |
| INTERNAL DIMENSIONAL DATA | | |
| NET Capacity (cubic ft.) | 18.97 | |
| Internal Width Overall (in) | 63" | |
| Internal Depth Overall (in) | 26" | |
| Internal Height Overall (in) | 25" | |
| Number of Shelves | 4 | |
| ELECTRICAL DATA | | |
| Full Load Amperes | 3.0 | |
| REFRIGERATION DATA | | |
| Horsepower | 1/5 | |
| Capacity (BTU/Hr) | 1350 | |
| SHIPPING DATA | | |
| Gross Weight - Crated | 358 lbs | |
| Height - Crated | 39" | |
| Width - Crated | 70" | |
| Depth - Crated | 35" | |

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Undercounter Refrigerator-Side Mount Models: UCR67AHC

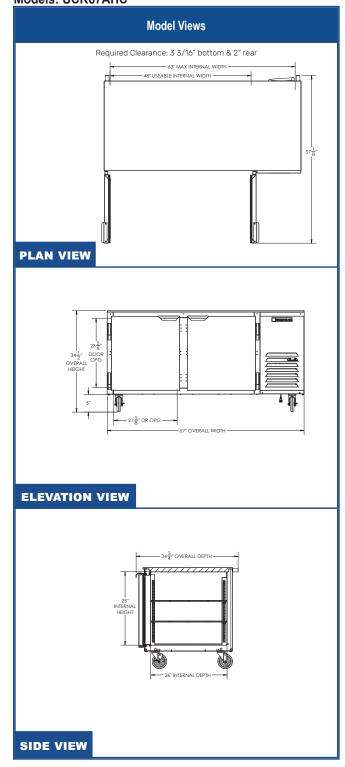

*ELECTRICAL CONNECTION



115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.

